


sales@clalighting.com.au

Tel: 02 9938 7100 | Fax: 02 9938 7115

LED SURFACE MOUNTED BATTEN (4FT) with inbuilt sensor

- Input voltage: 220-240V AC 50/60Hz
- Material: Aluminium & PC
- Wattage: 50W
- Power factor: ≥0.9
- LED chips: 480pcs Sanán SMD2835
- Built in Microwave sensor (SENS006)
- CRI: 82
- Ambient Temperature: -20 to 40°C
- Not suitable for dimming
- Suitable for 2-way switching
- Wired at one end (either rear or side cable entry)
- Mounting feet / spacer removeable



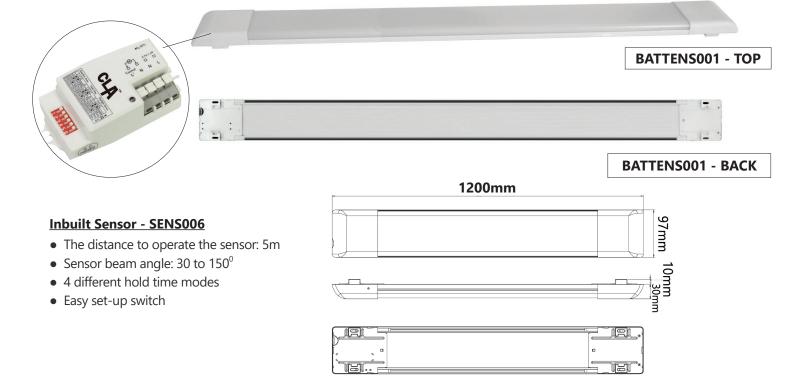

PART NO.	DESCRIPTION	KELVIN (K)	LUMENS (LM)	WATT	CRI	WEIGHT (KG)	BOX (CM)	CARTON QTY
BATTENS001	BATTEN LED S/M WH 5000K 50W 160D 1200mm 4FT	5000	4500	50	82	1.42	124 x 12 x 5.2	1/10

www.clalighting.com.au

BROCHURE UPDATED ON 23.04.2020